


# Cell Type UF503436F

## Specifications

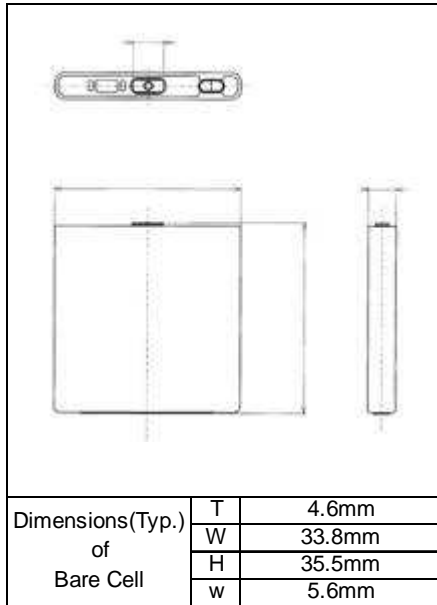


Nominal Capacity		Min.670mAh
Nominal Voltage		3.7V
Charging Method		Constant Current -Constant Voltage
Charging Voltage		4.20V
Charging Current		Std. 670mA
Charging Time		2.5hrs.
Ambient Temperature	Charge	0~+40°C
	Discharge	-20~+60°C
	Storage	-20~+50°C
Weight (Max.)		13.8g
Dimensions (Max.)	(T)	4.9mm
	(W)	33.95mm
	(H)	35.8mm
Volumetric Energy Density		416Wh/l
Gravimetric Energy Density		179Wh/kg

Discharged State after Assembling


\*The maximum thickness of the standard shipment charging condition

## Typical Characteristics

### Discharge rate characteristics

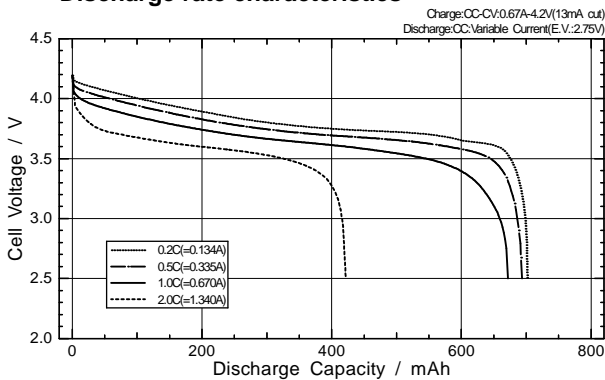

### Discharge temperature characteristics

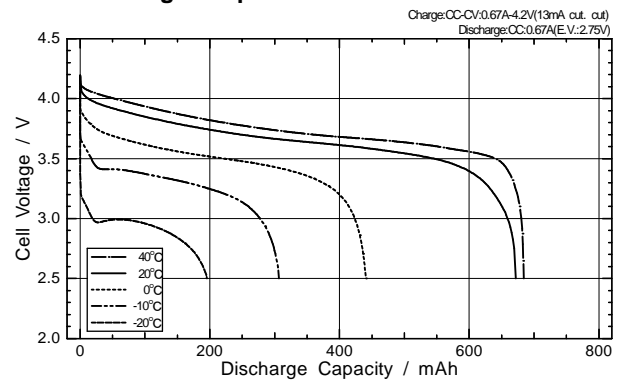

### Charge characteristics

