


SANYO

Lithium Polymer

Mar. 2007

Cell Type UPF574199

Specifications

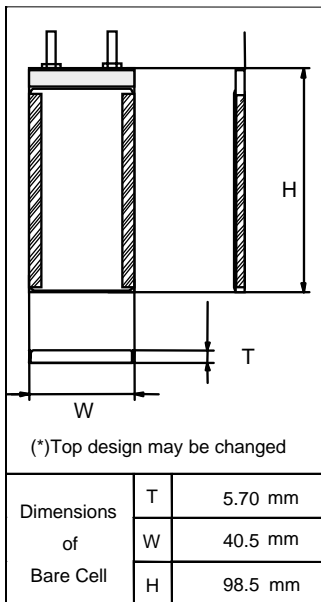


* Delivery state


Nominal Capacity		2150mAh
Typical Capacity		2250mAh
Nominal Voltage		3.7V
Charging Method		Constant Current -Constant Voltage
Charging Voltage		4.2V
Charging Current		Std.1500mA
Charging Time		3.0hrs.
Ambient Temperature	Charge	0 ~ +40deg.C
	Discharge	-20 ~ +60deg.C
	Storage	-20 ~ +60deg.C
Weight (Approx.)		46.0g
Dimensions (w/o tube, Max.)	(T) *	5.70mm
	(W)	41.0mm
	(H)	99.0mm
Volumetric Energy Density		344Wh/l
Gravimetric Energy Density		173Wh/kg

Typical Characteristics

Discharge rate characteristics

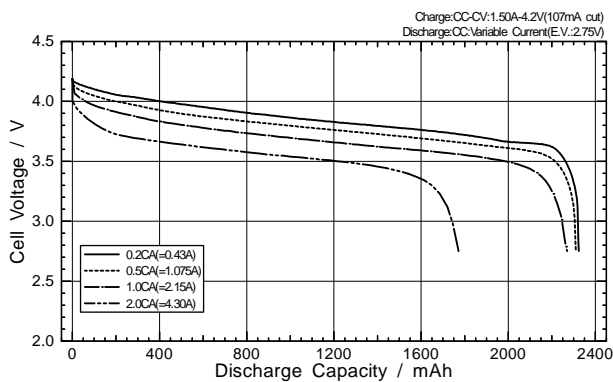

Discharge temperature characteristics

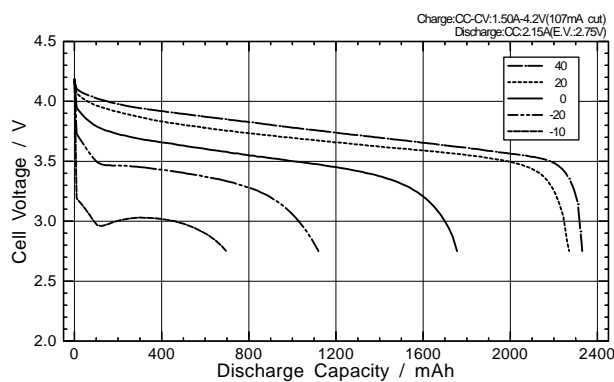

Charge characteristics

