


# SANYO

## Lithium Polymer

Mar. 2007

# Cell Type UPF606168

## Specifications

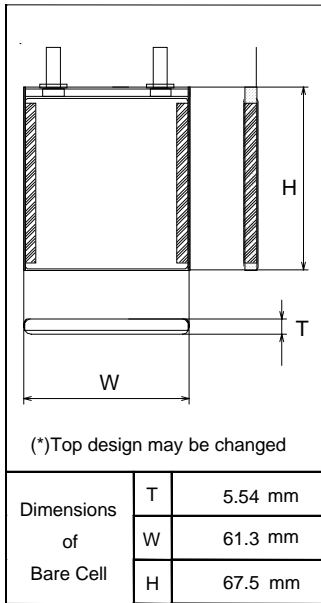


Nominal Capacity		2500mAh
Typical Capacity		2600mAh
Nominal Voltage		3.7V
Charging Method		Constant Current -Constant Voltage
Charging Voltage		4.2V
Charging Current		Std.1750mA
Charging Time		3.0hrs.
Ambient Temperature	Charge	0 ~ +40deg.C
	Discharge	-20 ~ +60deg.C
	Storage	-20 ~ +60deg.C
Weight (Approx.)		51.0g
Dimensions (w/o tube, Max.)	(T) *	5.74mm
	(W)	61.8mm
	(H)	68.0mm
Volumetric Energy Density		389Wh/l
Gravimetric Energy Density		182Wh/kg


\* Delivery state

### Typical Characteristics

#### Discharge rate characteristics

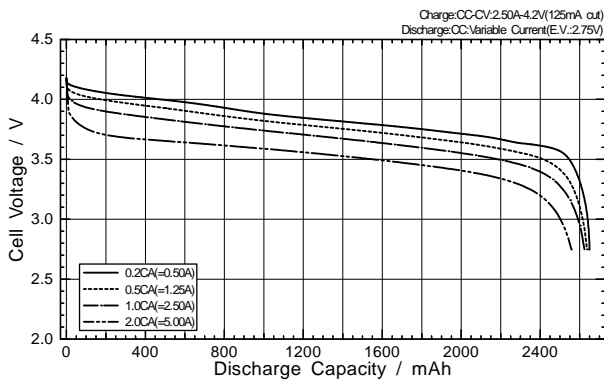

#### Discharge temperature characteristics

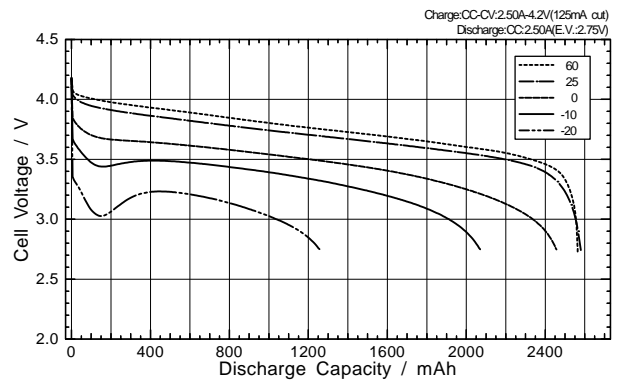

#### Charge characteristics

