


SANYO

Lithium Polymer

Mar. 2007

Cell Type UPF644496

Specifications

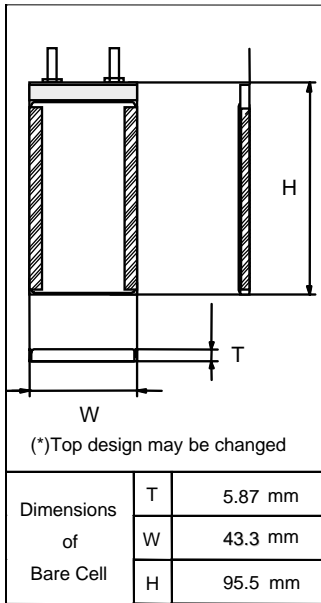


(*Top design may be changed)

* Delivery state


Nominal Capacity		2700mAh
Typical Capacity		2820mAh
Nominal Voltage		3.7V
Charging Method		Constant Current -Constant Voltage
Charging Voltage		4.2V
Charging Current		Std.1890mA
Charging Time		3.0hrs.
Ambient Temperature	Charge	0 ~ +40deg.C
	Discharge	-20 ~ +60deg.C
	Storage	-20 ~ +60deg.C
Weight (Approx.)		55.0g
Dimensions (w/o tube, Max.)	(T) *	6.02mm
	(W)	43.8mm
	(H)	96.0mm
Volumetric Energy Density		395Wh/l
Gravimetric Energy Density		180Wh/kg

Typical Characteristics

Discharge rate characteristics

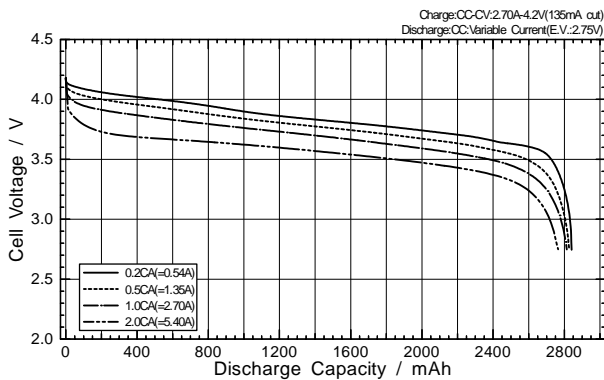

Discharge temperature characteristics

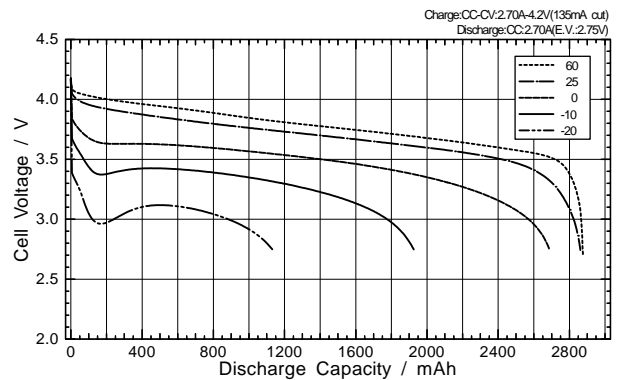

Charge characteristics

