


# SANYO Cadnica


## Cell Type KR-1200SCL Specifications

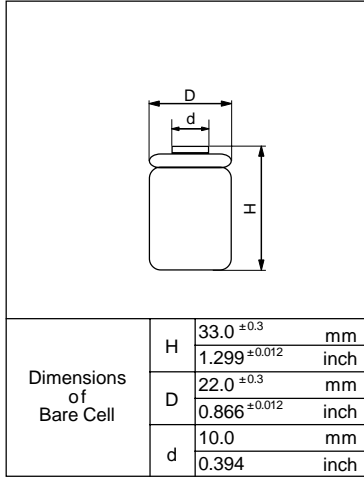


Nominal Capacity		1200mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	120mA	
	Quick	240mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	7 to 8Hrs.	
Ambient Temperature	Charge	Standard	0°C to +45°C [ +32°F to 113°F ]
		Quick	0°C to +45°C [ +32°F to 113°F ]
	Discharge	-20°C to +60°C [ -4°F to 140°F ]	
	Storage	-30°C to +50°C [ -22°F to 122°F ]	
Internal Impedance (Av.) (at 50% discharge)		9.7mΩ (at 1000Hz)	
Weight		38g/ 1.34oz	
Dimensions(D)x(H) (with tube)		22.9 <sup>0</sup> <sub>-1</sub> × 34.0 <sup>0</sup> <sub>-1.2</sub>	mm
		0.90 <sup>0</sup> <sub>-0.04</sub> × 1.34 <sup>0</sup> <sub>-0.05</sub>	inch

### Typical Characteristics


#### Charge

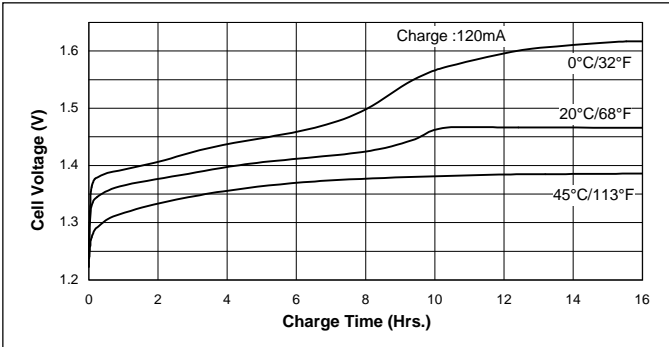


#### Discharge(at high rate)

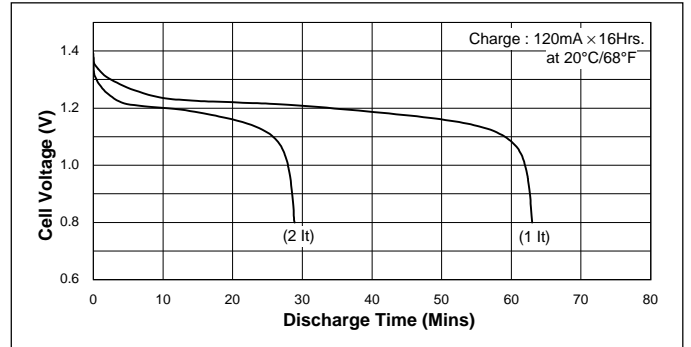


#### Charge

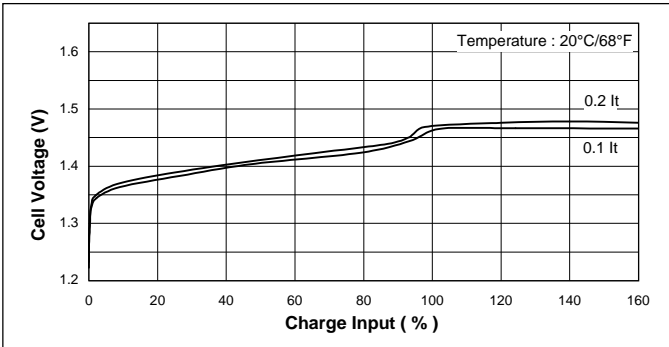

#### Discharge(at high rate)

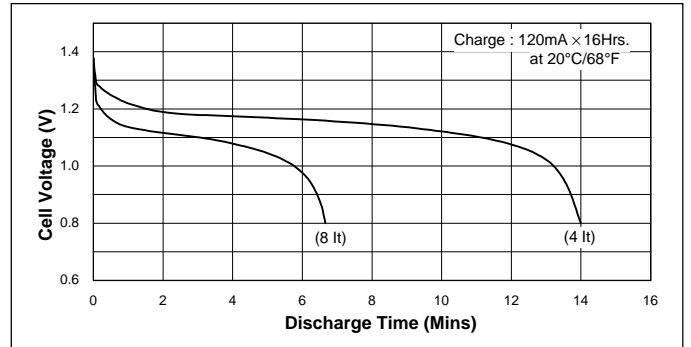

#### Discharge(at low rate)

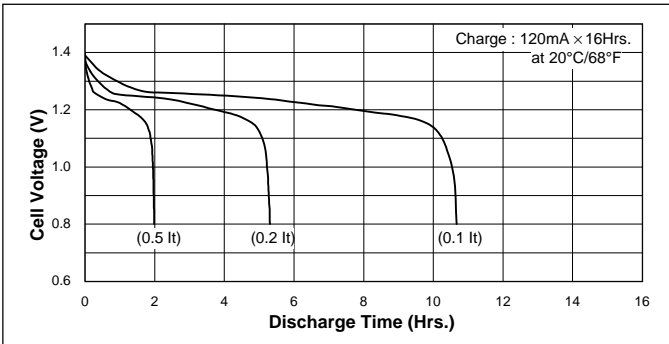

#### Temperature(Charge & Discharge)

