


SANYO

Cadnica

Cell Type N-270AAC

Specifications

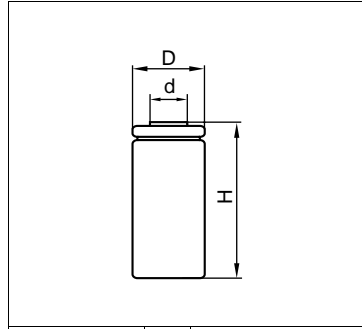

Dimensions of Bare Cell		H	29.5 ±0.3 mm
		1.161 ±0.012 inch	
	D	14.0 ±0.2 mm	
		0.551 ±0.008 inch	
	d	7.0 mm	
		0.276 inch	


Nominal Capacity		270mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	27mA	
	Quick	81mA	
	Fast	405mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	4 to 6Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Quick	10°C to +45°C [+50°F to 113°F]
		Fast	0°C to +45°C [+32°F to 113°F]
	Discharge		-20°C to +60°C [-4°F to 140°F]
	Storage		-30°C to +50°C [-22°F to 122°F]
Internal Impedance (Av.) (at 50% discharge)		18.0mΩ (at 1000Hz)	
Weight		13g/0.46oz	
Dimensions(D)×(H) (with tube)		14.5 ⁰ _{-0.5} × 30.3 ⁰ ₋₁ mm	
		0.57 ⁰ _{-0.02} × 1.19 ⁰ _{-0.04} inch	

Typical Characteristics


Charge




Discharge (at high rate)

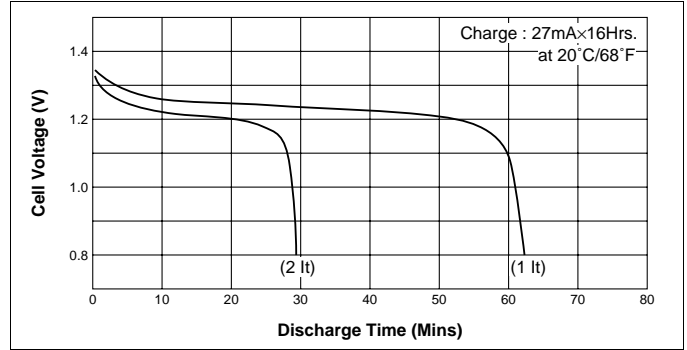


Charge

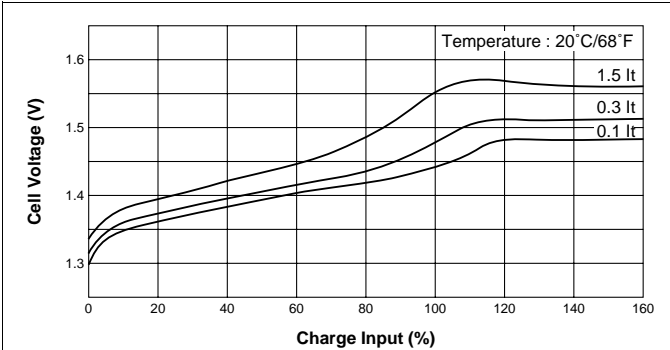

Discharge (at high rate)

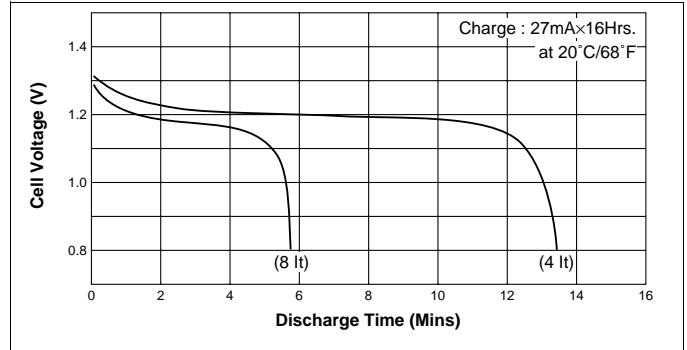

Discharge (at low rate)

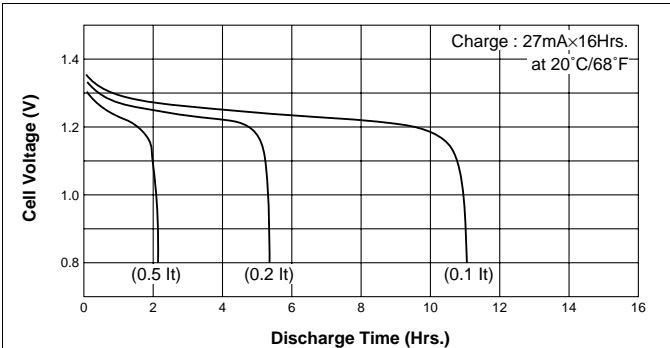

Temperature (Charge & Discharge)

